FCDP-U8

DP 1.4 Hybrid optical cable

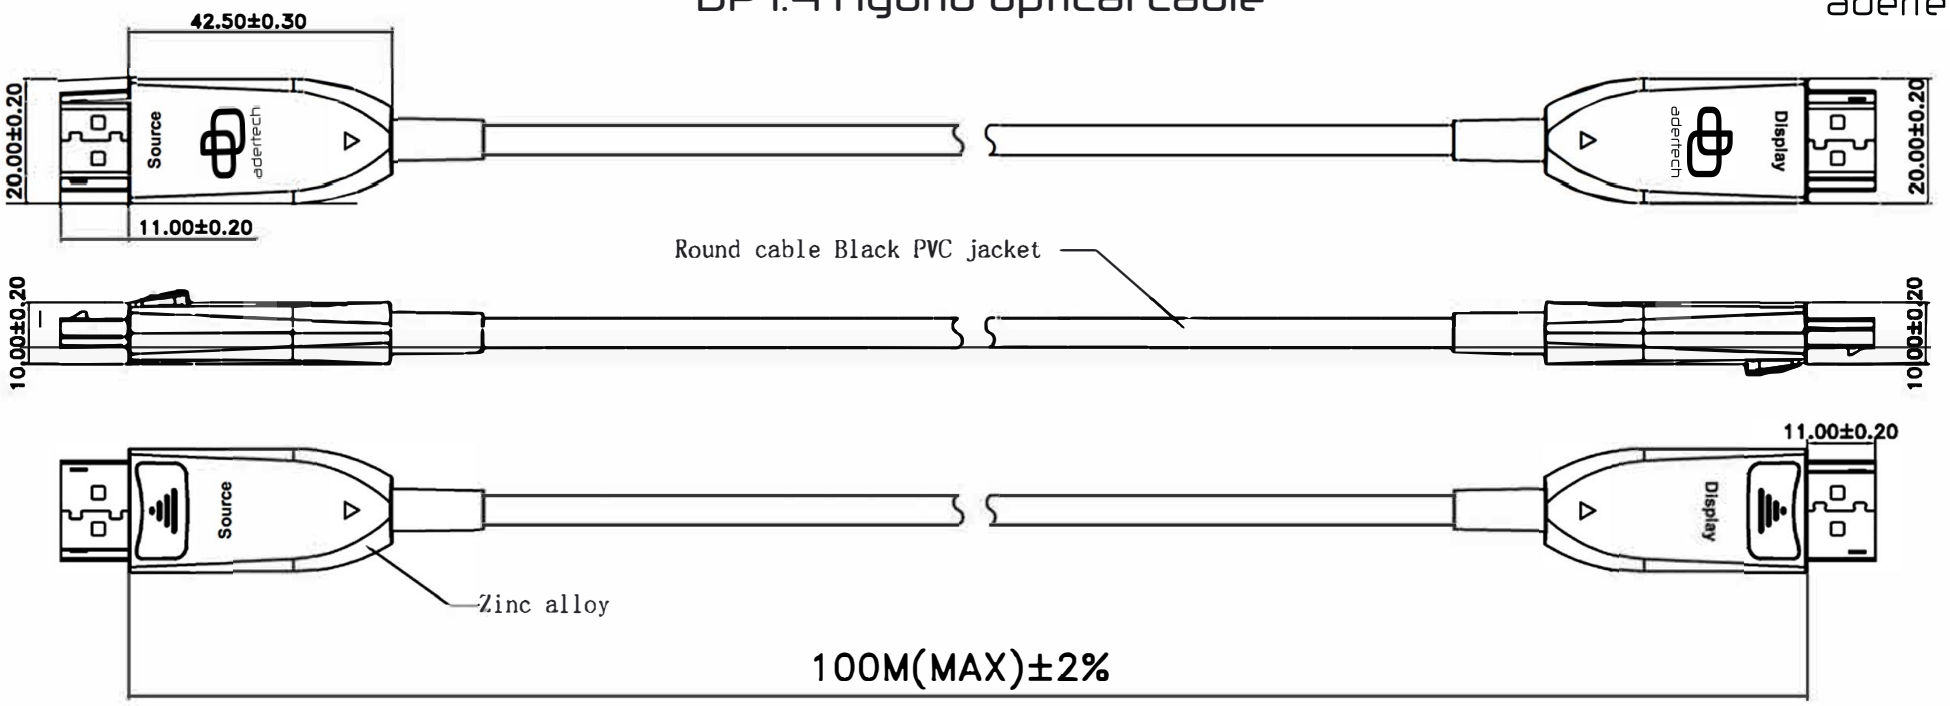

NOTE:

- Supports computer resolutions to 8K@60Hz/ 4K@120Hz 4:4:4
- Plug and Play
- Compatible with DP1.4 standard.
- Support HDCP 2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2. O & REACH compliant
- Packing: package 1pc reel

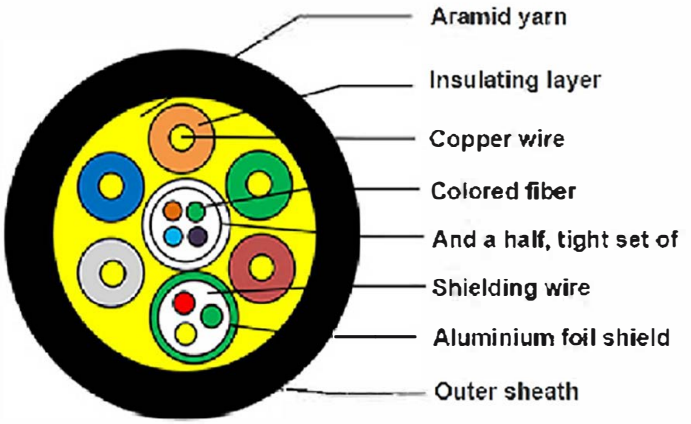

All trademarks are the property of their respective owners. ADERTECH is not responsible for any errors that may appear in this document publication. Product, pricing and feature information contained herein is subject to change without notice.

© 2023 ADERTECH Co Ltd. The ADERTECH logo and associated visual identity are trademarks or registered trademarks of ADERTECH and/or its affiliates.