100V Volume Control

CTRL-VC

- PA (Public address) system use 100V volume control
- Background music system use 100-volt attenuator
- Classic range volume controller for cost-effective system use
- The volume controller is used to adjust the loudspeaker output in the room
- The volume controller is used to keep same output level for one same speaker line, because the end the speaker line signal loss is rather big, so its outputs is less, thus volume controller is added to the front of the line to lower the speaker output so as to keep the similar ambient output level for the all of the speaker in the same line
- High level white UV-protected ABS material to integrate together with the white wall and architecture design
- Built-in transformer to control the PA 100V line loudspeakers
- With 4 levels of volume attenuator and one position of off
- Surface wall mount or in-wall mounting box shall be purchased separated



Specification:

Description	100V Volume Control
Rated Output	120W
Line Input	100V or 70V
Volume Step	5 steps
Attenuation Per Step	3dB
Total Attenuation	33dB
Material	UV-protected ABS
Finish	White
Mounting Way	Surface mount or in-wall mount
Depth	60mm
Plate Dimension	86(W)×86(D)mm

Dimension & Side View

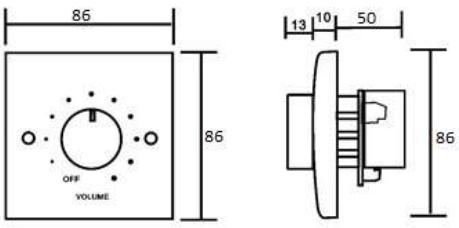

Wiring Diagram:

