RIDE-T3-IP

RIDE-T3-IP - is a column type 2-way all weather loudspeaker featuring eight 4” low frequency driver and two 2.5” tweeters. Thanks to its array design the low and middle range drives and high frequency tweeters the speaker is ideal for background music, paging system and other PA applications. Speaker is equipped with high quality 100V transformer with several power taps, the maximum power is 160W. The speaker enclosure and grille made of aluminum alloy and designed for the outdoor usage. The grill with sound-permeable fabric protects speaker elements from dust and other objects. The provided wall mount bracket allows freely aiming the speaker to the right direction, while the wide dispersion diagram ensures the best acoustic results. The minimalistic and elegant design ensures the best choice for modern building installation.



Horizontal and Vertical Polar Responses:

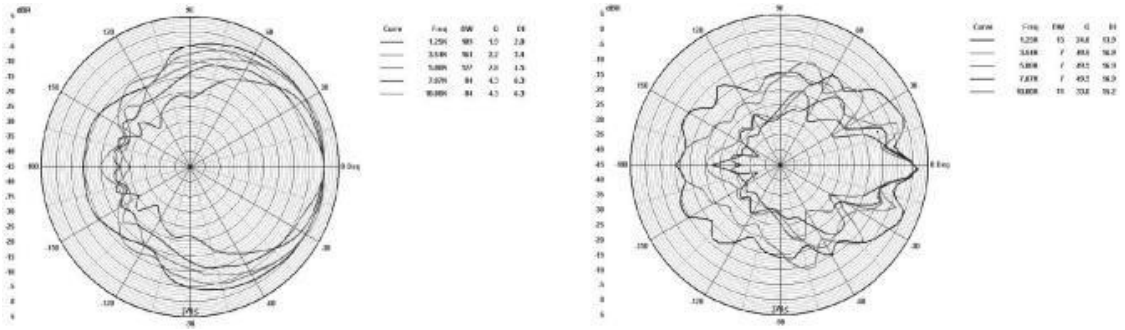

Impedance Diagram and Frequency Response:

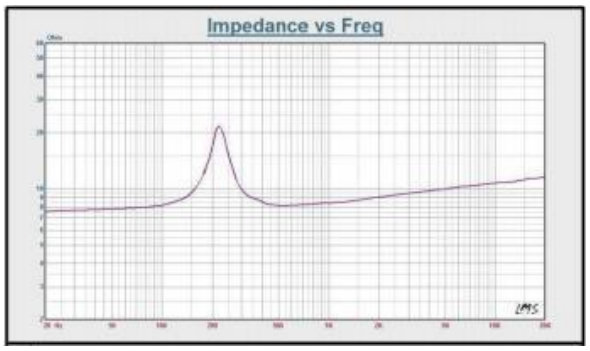



Specification:

SKU	**RIDE-T3-IP**
Type	Column Speaker
Rated Power	80W
Input Options	100V
Transformer Taps	20W / 40W / 80W
Ways	2
Drivers	8x 4” low-middle range woofers
	2x 2.5” high frequency tweeters
Effective frequency range	100 - 16KHz (+/- 3dB)
Sound Pressure Level	120dB
Sensitivity	92dB, measured at 1W/m
Horizontal/Vertical Dispersion	150° / 15°
IP Rate	IP66
Connection type	4x wires cable tail
Enclosure	Aluminum alloy, powder coated
Grille	Aluminum alloy, powder coated, sound-permeable fabric
Finished colour	RIDE-T3-IPB (Black), RIDE-T3-IPW (White)
Mounting options	Wall mount, bracket with 2x axis adjust (rotate, tilt)
Dimension (HxWxD)	942×97x86mm
Weight	6.0kg