


CCHD-U4 series

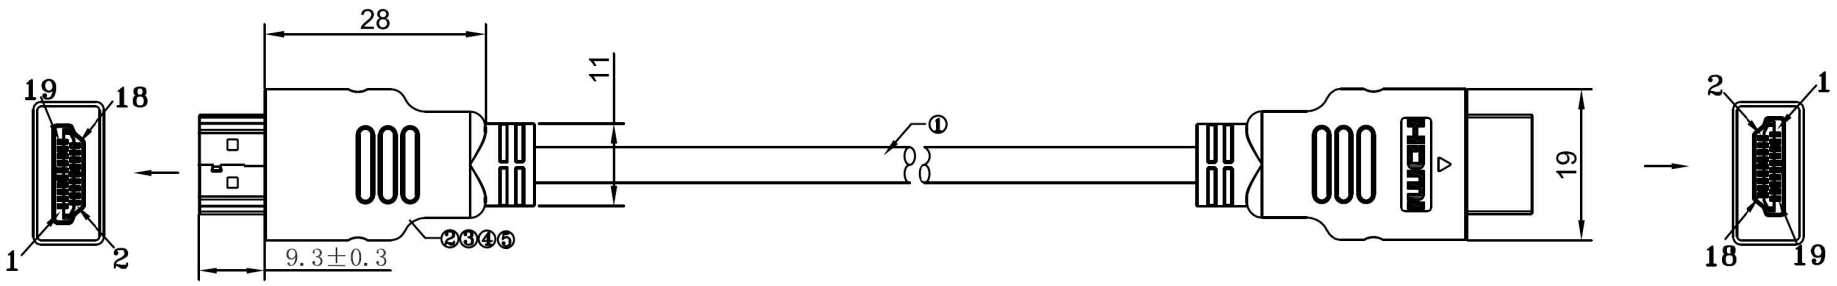

CN1 (HDMI 19P/MALE MOLDING) CN2




PIN OUT

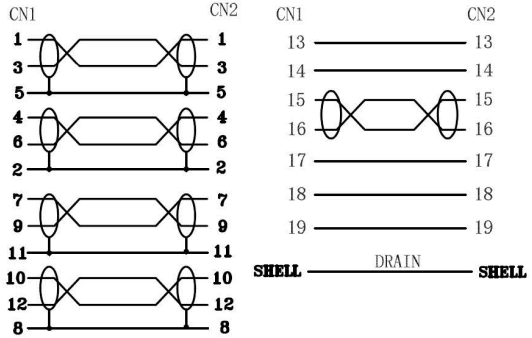

CABLE CONSIRUCTION

HDMI 19+1

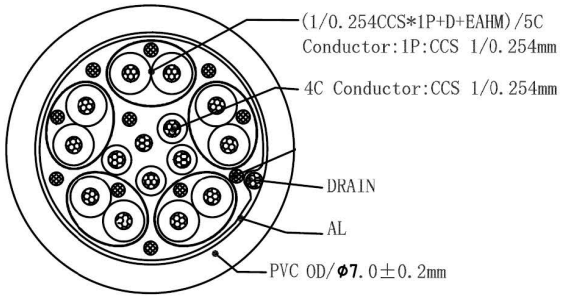

NOTES:

ELECIRICAL:

(1). 100% CONTINUITY(OPEN, SHORT, MISSWIRE);

(2). INSULATION RESISTANCE:300V, 5MΩ MIN;

(3). CONDUCTIVE RESISTANCE: 5ΩMAX/M;

(4). 100% HDTV-DVD TEST:4K @ 60HZ;4:2:0

(5). WIRE SURFACE PRINTING (WHITE):HIGH SPEED HDMI® CABLE WITH ETHERNET

NO.	Part name	Specifications describe	Dosage	UNIT
⑥	MINI TIE	PVC TIE, BLACK OUTSIDE	2	PCS
⑤			2	PCS
④	OUT MOLD	45P PVC, COLOR FOR BLACK	2	PCS
③	INNER MOLD	LD-PE, COLOR FOR NATURAL	2	PCS
②	CONNECTOR	HDMI A MALE, HOUSING FOR BLACK PLASTIC, TERMINAL FOR PHOSPHOR Cu AND GOLD PLATED, A'SSY SHELL FOR SPCC METAL AND GOLD PLATING	2	PCS
①	HDMI CABLE	HDMI2.0(30#1/0.254CCS*1PR+EAHM)*5+30#1/0.254CCS*4C+D. BLACK PVC JACKET, OD:7.0±0.2mm	1	PCS

adertech