
CLS-SW8TX





CLS-SW8TX - is a frameless ceiling subwoofer loudspeaker featuring a 8” low frequency driver. Thanks to fiber glass cone for the low range frequencies the speaker is ideal for adding heavy bass sounds to background music, paging system and other PA applications. Speaker is equipped with high quality 70V/100V transformer with several power taps. The speaker baffle made of robust ABS plastic while the back can made of metal for better low frequency sounds reproduction and extended protection for the speaker components. Entire construction makes it suitable for different ceiling heights for indoor installations. The steel grill with sound-permeable fabric protects speaker elements from dust and other objects. The narrow plastic ring is used to fix the grill to the speaker body by several clamps makes installation and maintenance fast and simple. The frameless look design ensures is the best choice for modern building installation.

Impedance Diagram and Frequency Response:

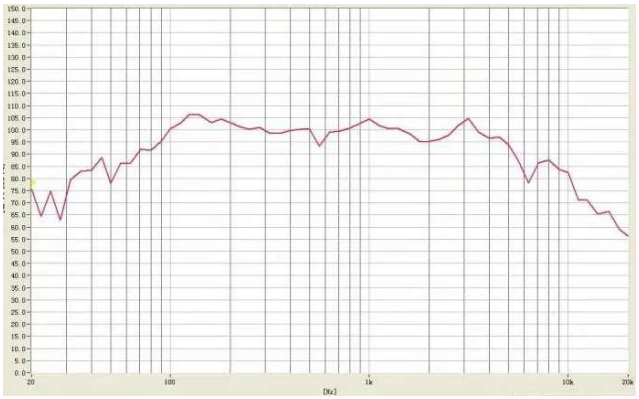


Specification:

SKU	**CLS-SW8TX**
Type	Subwoofer Ceiling Speaker
Rated Power	60W
Input Options	8Ohm / 70V / 100V
Transformer Taps	7.5W / 15W / 30W / 60W / 8Ohm
Ways	1
Drivers	8” low range woofer, fiberglass cone
Effective frequency range	40 - 108Hz
Sound Pressure Level	89 +/- 3dB
Connection type	Screw Terminal 4-pin
Baffle	Black ABS
Back Can	Steel, Black
Grille	Steel, powder coated, sound-permeable fabric, plastic clamps fixing
Finished colour	White
Mounting options	In ceiling, cutout Ø270mm
Dimension (ØxD)	305×215mm
Weight	4.8kg